

Cloud Nine - Hall

Lights

<p>DESK 1x High End Roadhog 4 (software v3.7.1 b1546) 1x Hog3 mini playback wing</p> <p>DIMMERS 36x MA dimmer channel 2,3kW on CEE1p16A in grid</p> <p>STAGE - CONVENTIONAL 4x cateye 500W blinder 6x Par64 floorcan 1kW medium 4x Desisti 1kW Fresnel</p> <p>STAGE - INTELLIGENT 8x Clay Paky Alpha spot HPE 300 8x Martin Mac Aura 6x Cls pixelbar tri colore rgb 10x Cls ledpar RGBAW+UV</p> <p>FRONTLIGHT 6x Profile 1kW Robert Juliat 614SX 1kW 6x Desisti 1kW Fresnel</p> <p>STAGE - DATA 4x Cat6A (2xFOH, 2x S.R.) 2x Dmx in S.R. 4x DMx out (2x S.L., 2x S.R.) 2x Dmx in FOH</p> <p>Houselight (all fixed) 4x Dynamic White 4x Martin Mac Aura 30x Cls ledpar RGBAW+UV</p> <p>SMOKE 1x MDG ATME + Generic FAN</p>	<p>LIGHTPLOT Separated</p> <p>PATCHLIST See page 2</p>
---	--

Cloud Nine - Hall

Lights – Patchlist

DMX-PATCH
CONVENTIONAL + LEDSTRIPS – Lijn 1
Guestdesk (Artnet 1.1)
HouseDesk (Artnet 0.1)

#	Description	Where	Address	Remarks
	Dimmers		1 t/m 36	36 channels
901	CLS rgbawuv LED Par	Grid stage	37	8channels: dim+rgbawp+strobe
902	CLS rgbawuv LED Par	Grid stage	45	8channels: dim+rgbawp+strobe
903	CLS rgbawuv LED Par	Grid stage	53	8channels: dim+rgbawp+strobe
904	CLS rgbawuv LED Par	Grid stage	61	8channels: dim+rgbawp+strobe
905	CLS rgbawuv LED Par	Grid stage	69	8channels: dim+rgbawp+strobe
906	CLS rgbawuv LED Par	Grid stage	77	8channels: dim+rgbawp+strobe
907	CLS rgbawuv LED Par	Grid stage	85	8channels: dim+rgbawp+strobe
908	CLS rgbawuv LED Par	Grid stage	93	8channels: dim+rgbawp+strobe
909	CLS rgbawuv LED Par	Grid stage	101	8channels: dim+rgbawp+strobe
910	CLS rgbawuv LED Par	Grid stage	109	8channels: dim+rgbawp+strobe
911	CLS rgbawuv LED Par	Hall	117	8channels: dim+rgbawp+strobe
912	CLS rgbawuv LED Par	Balcony	125	8channels: dim+rgbawp+strobe
913	CLS rgbawuv LED Par	Balcony	133	8channels: dim+rgbawp+strobe
914	CLS rgbawuv LED Par	Hall	141	8channels: dim+rgbawp+strobe
915	CLS rgbawuv LED Par	Balcony	149	8channels: dim+rgbawp+strobe
916	CLS rgbawuv LED Par	Hall	157	8channels: dim+rgbawp+strobe
917	CLS rgbawuv LED Par	Balcony	165	8channels: dim+rgbawp+strobe
918	CLS rgbawuv LED Par	Hall	173	8channels: dim+rgbawp+strobe
919	CLS rgbawuv LED Par	Balcony	181	8channels: dim+rgbawp+strobe
920	CLS rgbawuv LED Par	Balcony	189	8channels: dim+rgbawp+strobe
921	CLS rgbawuv LED Par	Hall	197	8channels: dim+rgbawp+strobe
922	CLS rgbawuv LED Par	Hall	205	8channels: dim+rgbawp+strobe
923	CLS rgbawuv LED Par	Balcony	213	8channels: dim+rgbawp+strobe
924	CLS rgbawuv LED Par	Hall	221	8channels: dim+rgbawp+strobe
925	CLS rgbawuv LED Par	Balcony	229	8channels: dim+rgbawp+strobe
926	CLS rgbawuv LED Par	Hall	237	8channels: dim+rgbawp+strobe
927	CLS rgbawuv LED Par	Balcony	245	8channels: dim+rgbawp+strobe
928	CLS rgbawuv LED Par	Hall	253	8channels: dim+rgbawp+strobe
929	CLS rgbawuv LED Par	Hall	261	8channels: dim+rgbawp+strobe
930	CLS rgbawuv LED Par	Balcony	269	8channels: dim+rgbawp+strobe
931	CLS rgbawuv LED Par	Hall	277	8channels: dim+rgbawp+strobe
932	CLS rgbawuv LED Par	Balcony	285	8channels: dim+rgbawp+strobe
933	CLS rgbawuv LED Par	Hall	293	8channels: dim+rgbawp+strobe
934	CLS rgbawuv LED Par	Balcony	301	8channels: dim+rgbawp+strobe
935	CLS rgbawuv LED Par	Hall	309	8channels: dim+rgbawp+strobe
936	CLS rgbawuv LED Par	Balcony	317	8channels: dim+rgbawp+strobe
937	CLS rgbawuv LED Par	Hall	325	8channels: dim+rgbawp+strobe
938	CLS rgbawuv LED Par	Hall	333	8channels: dim+rgbawp+strobe
939	CLS rgbawuv LED Par	Balcony	341	8channels: dim+rgbawp+strobe
940	CLS rgbawuv LED Par	Hall	349	8channels: dim+rgbawp+strobe
501	Cls pixelbar tricolore	Stagefloor	357	synch mode, 3 ch RGB for complete bar
502	Cls pixelbar tricolore	Stagefloor	360	synch mode, 3 ch RGB for complete bar
503	Cls pixelbar tricolore	Stagefloor	363	synch mode, 3 ch RGB for complete bar
504	Cls pixelbar tricolore	Stagefloor	366	synch mode, 3 ch RGB for complete bar
505	Cls pixelbar tricolore	Stagefloor	369	synch mode, 3 ch RGB for complete bar
506	Cls pixelbar tricolore	Stagefloor	372	synch mode, 3 ch RGB for complete bar
601	Dynamic White Par	Balcony	375	2channels: dim+strobe
602	Dynamic White Par	Balcony Merch	377	2channels: dim+strobe
603	Dynamic White Par	Balcony	379	2channels: dim+strobe
604	Dynamic White Par	Grid Stage	381	2channels: dim+strobe
	Free		383 t/m 511	
	Fluorescence balcony	KNX System	512	

Cloud Nine - Hall

Lights – Patchlist (continued)

Dimmer patch	
Description	Dimmer channels
Up stage fresnels	1-2-3-4
Fresnels Downstage	13-16
Fresnels frontlight	26-27-30-31
Profiles	21-24-25-29-33-36
Cateye Blinder	9-12-14-15


DMX-PATCH INTELLIGENT – Lijn 2 Guestdesk (Artnet 1.2) Housedesk (Artnet 0.2)

#	Description	Where	Address	Aura FX	Remarks
301	Clay Paky HPE 300	Grid stage	1		Standard
302	Clay Paky HPE 300	Grid stage	24		Standard
303	Clay Paky HPE 300	Grid stage	47		Standard
304	Clay Paky HPE 300	Grid stage	70		Standard
305	Clay Paky HPE 300	Grid stage	93		Standard
306	Clay Paky HPE 300	Grid stage	116		Standard
307	Clay Paky HPE 300	Grid stage	139		Standard
308	Clay Paky HPE 300	Grid stage	162		Standard
	Free		185 t/m 200		
401	Mac Aura	Grid stage	201	215	Ext., hog4 needs 2 personality's: aura fx +mac aura
402	Mac Aura	Grid stage	226	240	Ext., hog4 needs 2 personality's: aura fx +mac aura
403	Mac Aura	Grid stage	251	265	Ext., hog4 needs 2 personality's: aura fx +mac aura
404	Mac Aura	Grid stage	276	290	Ext., hog4 needs 2 personality's: aura fx +mac aura
405	Mac Aura	Grid stage	301	315	Ext., hog4 needs 2 personality's: aura fx +mac aura
406	Mac Aura	Grid stage	326	340	Ext., hog4 needs 2 personality's: aura fx +mac aura
407	Mac Aura	Grid stage	351	365	Ext., hog4 needs 2 personality's: aura fx +mac aura
408	Mac Aura	Grid stage	376	390	Ext., hog4 needs 2 personality's: aura fx +mac aura
409	Mac Aura	Grid House	401	415	Ext., hog4 needs 2 personality's: aura fx +mac aura
410	Mac Aura	Grid House	426	440	Ext., hog4 needs 2 personality's: aura fx +mac aura
411	Mac Aura	Grid House	451	465	Ext., hog4 needs 2 personality's: aura fx +mac aura
412	Mac Aura	Grid House	476	490	Ext., hog4 needs 2 personality's: aura fx +mac aura
	Free		501 t/m 512		

IP-ADRESSES LIGHTNETWORK

Location	Housedesk	Guestdesk	Cuecore	Nodes				Remotes
Grote zaal	2.1.0.1	2.1.0.2		2.1.1.1	2.1.1.2			2.1.2.1-100
Ronda	2.2.0.1	2.2.0.2	2.2.0.10	2.2.1.1	2.2.1.2			2.2.2.1-100
Pandora	2.3.0.1	2.3.0.2		2.3.1.1				2.3.2.1-100
Hertz	2.4.0.1	2.4.0.2	2.4.0.10	2.4.1.1				2.4.2.1-100
Cloud9	2.5.0.1	2.5.0.2		2.5.1.1				2.5.2.1-100
workshop	2.6.0.1	2.6.0.2		2.6.1.1				2.6.2.1-100
Plein 5&6	2.7.0.1		2.7.0.10					
Foyers			2.7.0.11	2.7.1.1	2.7.1.2	2.7.1.3	2.7.1.4	
Roof			2.8.0.10					
Rabo open stage			2.9.0.10					
Input node				2.10.1.1				
Output node				2.11.1.1				
House laptop	2.100.0.1							

TIVOLI VREDEN BURG

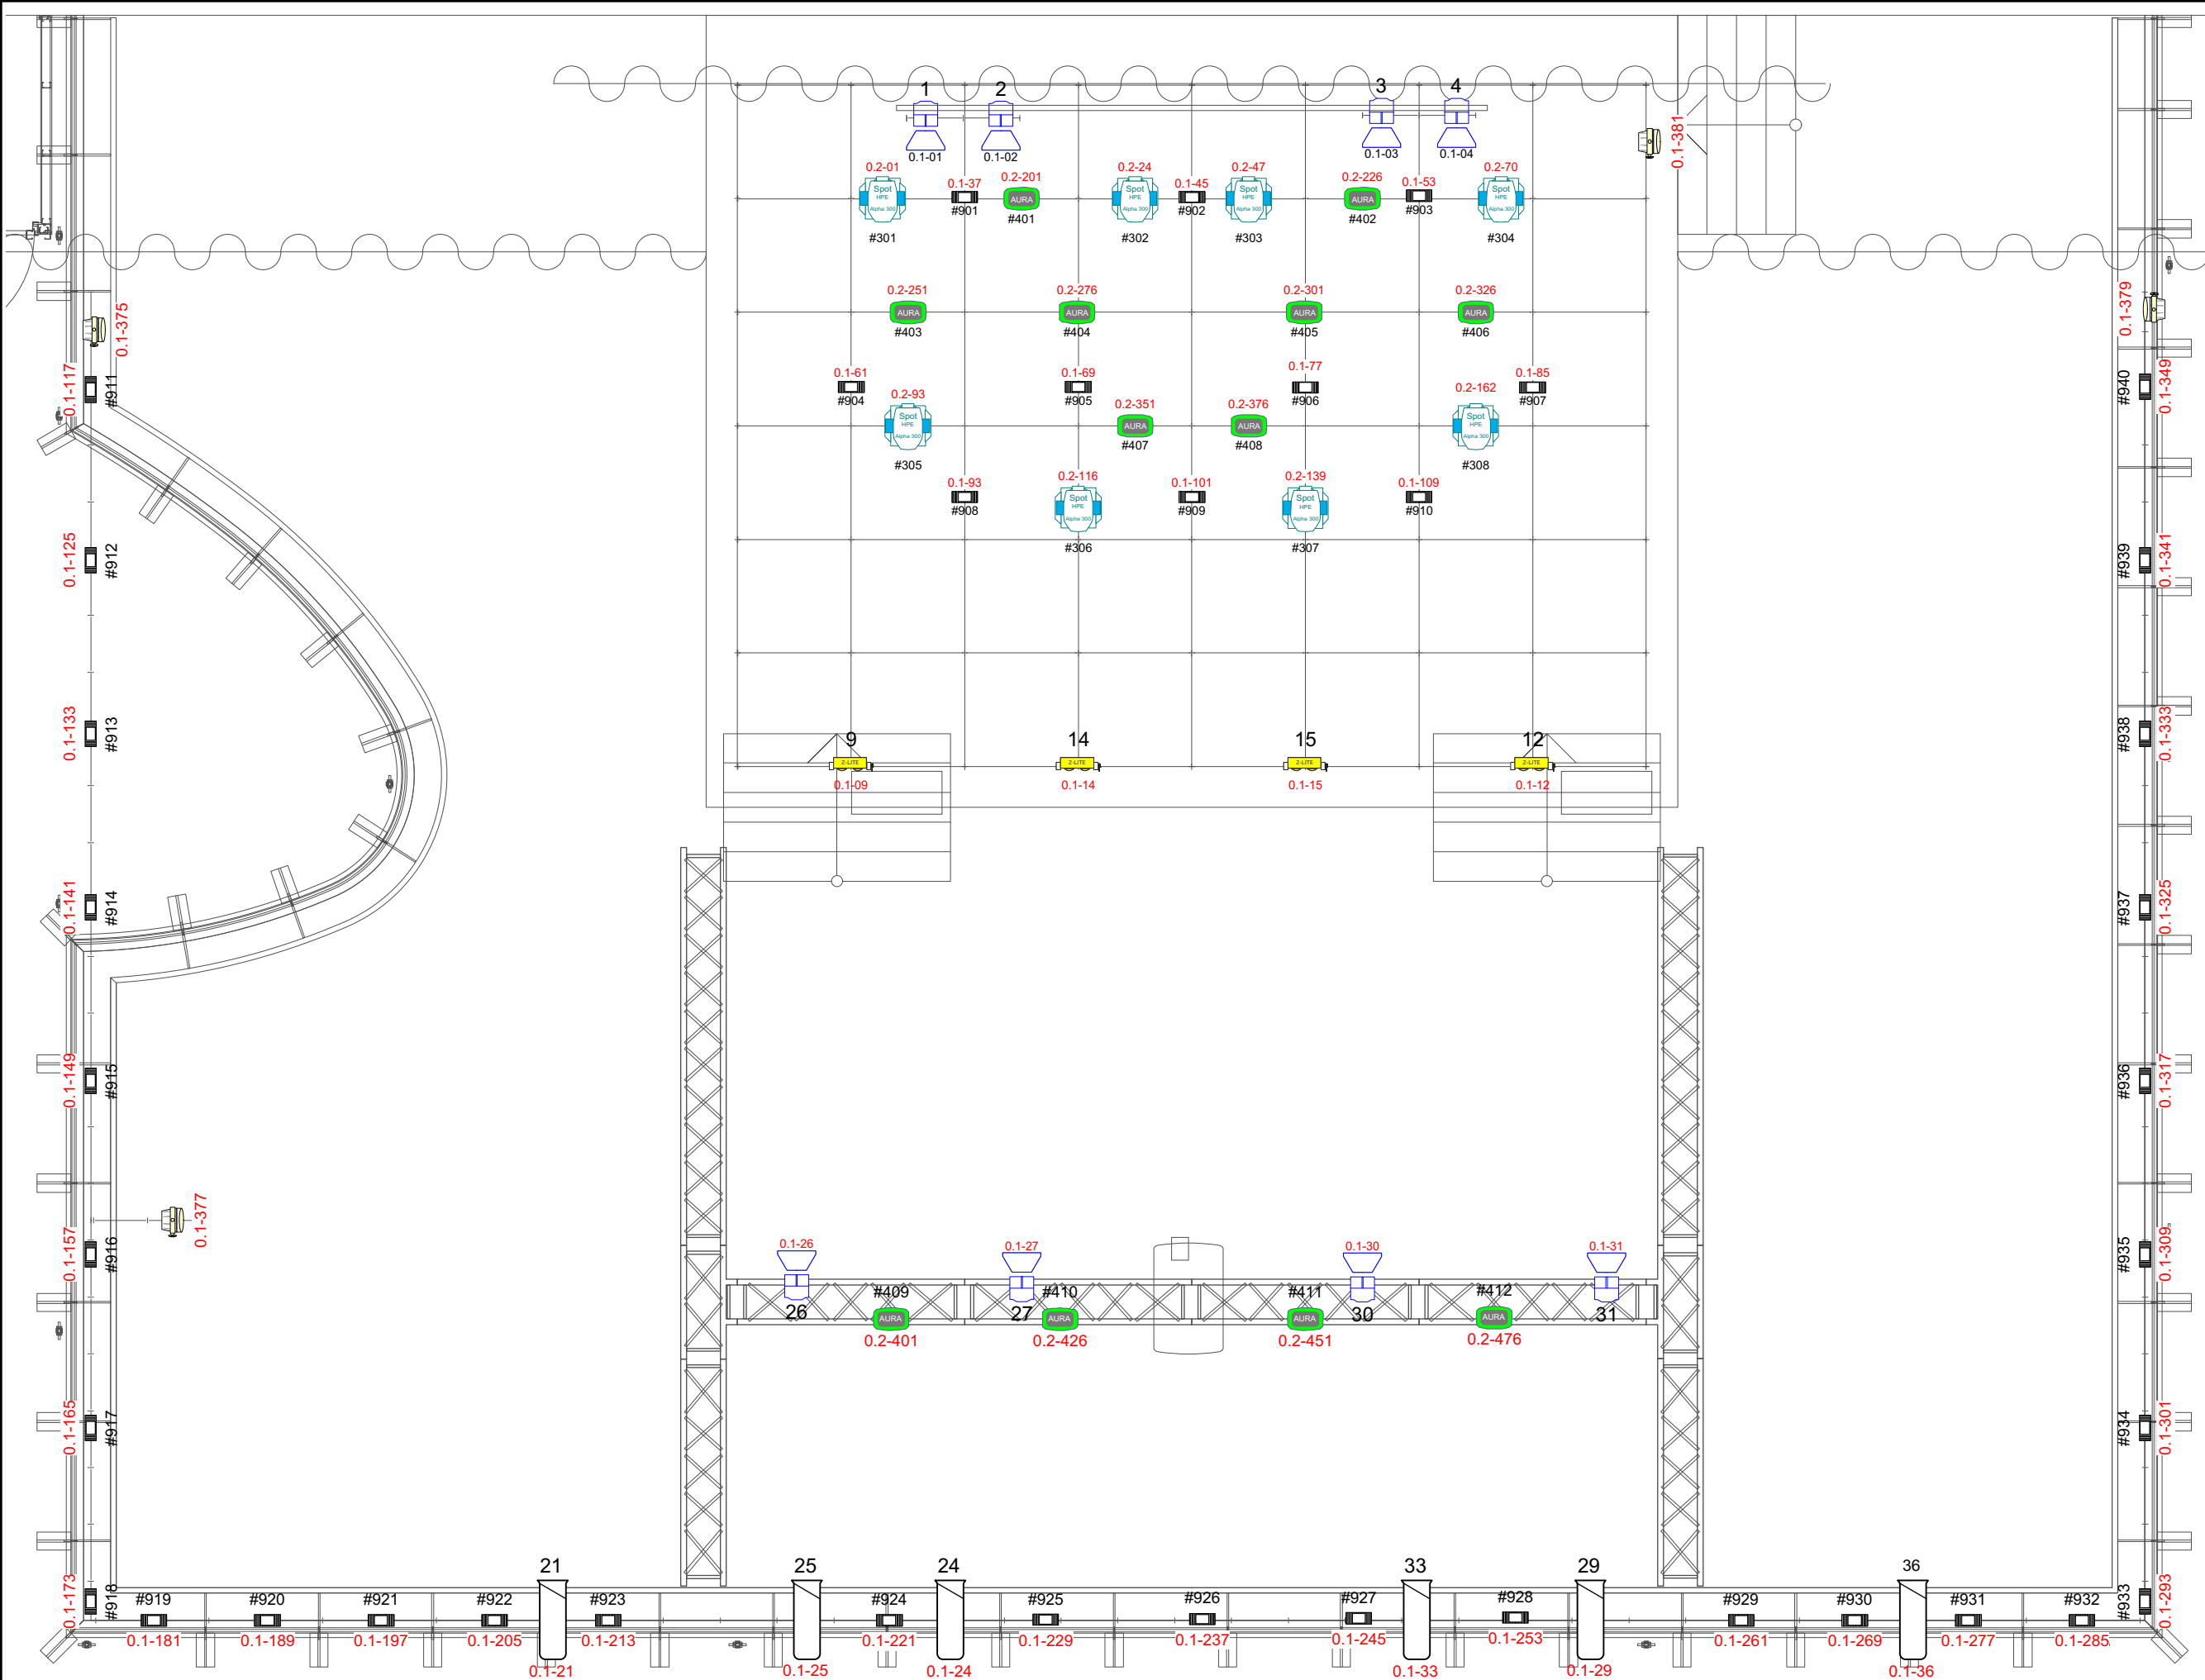

MovingLight: All Layers

Qty	Sym	Type
8x		ALPHA SPOT HPE 300
12x		AURA WASH LED
40x		LedPar RGBAW+UV
4x		Dynamic White Par

Conventional: All Layers

Qty	Sym	Type
8x		Fresnel 1 Kw
4x		2Lite Par36
6x		614 SX

Show Name Cloud9 Overview		
Reference TivoliVredenburg	Drawn By TV	Date 11/04/2018
CAD File Name Cloud9		